


STOP WAITING. START DEPLOYING.

Become the fastest CCTV installer
in Your city.




TRADITIONAL SETUP

Weeks or months. Multiple suppliers. High complexity.

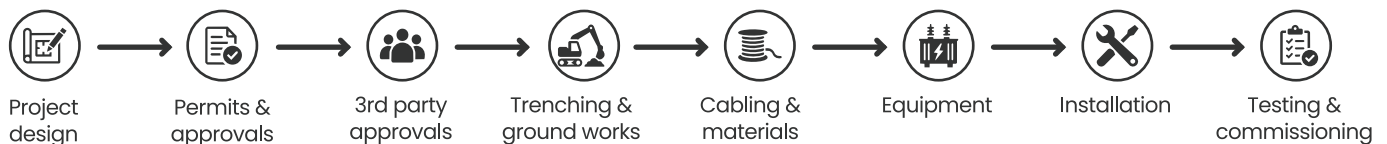


ENERBOOOST SETUP

Same-day deployment. One product. Fewer dependencies.

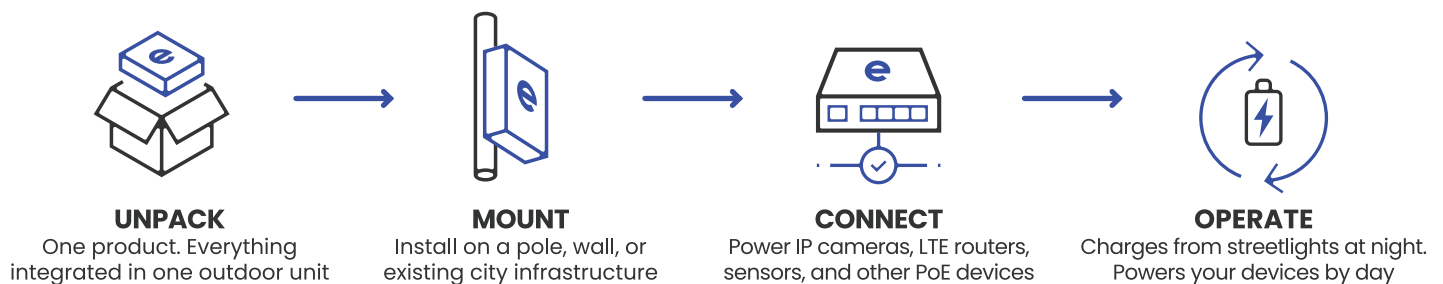

HOW DOES IT OPERATE?

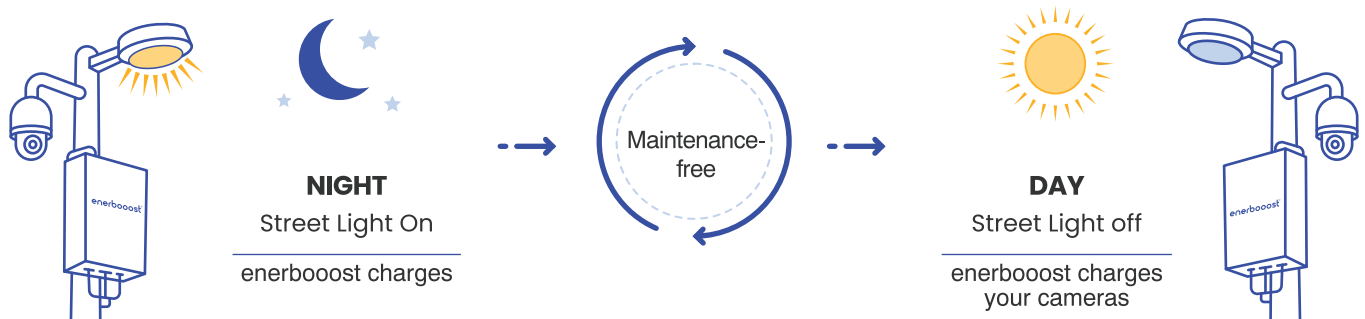

WHAT CHANGES WITH ENERBOOOST?



SCAN and see how much you could save



What's in the box

enerboost 12 Ah
ST-EB-48V12Ah



**Mounting
bracket lock plate**
ST-EB-MB-lock



**Power
3 position
Hood kit**
ST-EB-200-EXT



**enerboost
manual**



**Bulkhead
plug**
ST-EB-CUP



**RJ45
Hood kit**
ST-EB-ETH



Screws
DIN 912 M4x10



Mounting bracket
ST-EB-MB



Switch	
Ethernet ports	4
Ethernet speed	10/100 Mbps
PoE output ports	4
PoE output power	4 x 30 W, total 120 W
PoE output voltage	48 V
PoE type	Type 1, 2 (PoE, PoE+, 802.3af/at)
Dimensions	
Dimension (H x W x D)	340 x 264 x 111 mm
Weight	7.4 kg
Mounting	Pole
Application	Indoor/Outdoor
Bluetooth	
Bluetooth	4.2

Power	
AC input voltage	100-240 VAC
AC input frequency	50-60 Hz
AC input max power draw	380 W
Safety Standard Approval	
IP	65
Certificate	CE
Battery	
Cell chemistry	LFP (LiFePO4)
Pack capacity	12 Ah, 576 Wh
Temperature	
Operational temp.	-20°C to 60°C
Charge temp.	-20°C to 60°C
Storage temp.	0°C to 45°C

Runtime depends on connected devices – under 4h charging time



	1x IP camera + LTE device	12W (7W + 5W)	Up to 48h
	2x IP camera + LTE device	19W (14W + 5W)	Up to 30h
	3x IP camera + LTE device	26W (21W + 5W)	Up to 22h



Formula
Runtime = 576Wh /
connected load



576Wh
LFP battery



3000+ cycles
(8+ years with
daily charging)

